




EXCELLENCE IN ENGINEERED ALLOYS

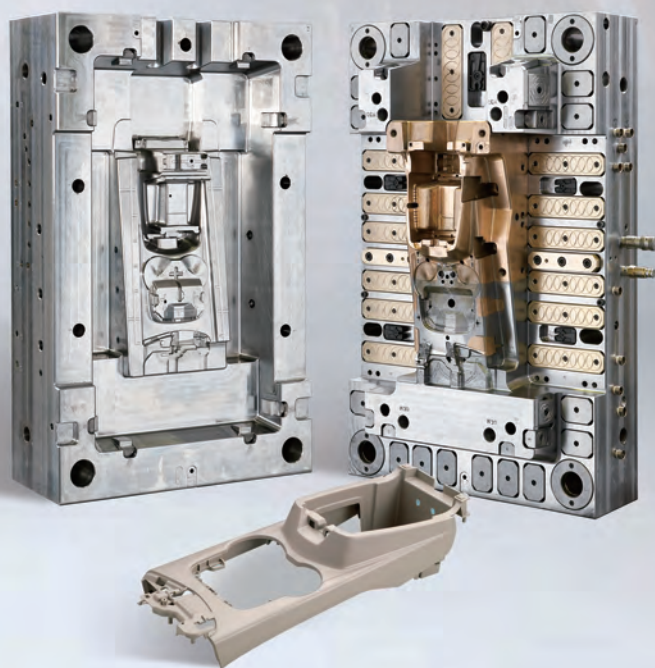

SPECIAL ALLOYS

FOR WEAR, CORROSION RESISTANT &
HIGH CONDUCTIVITY APPLICATIONS



www.ampcometal.com



AMPCO Reference	Nearest International Standards				
	ISO	AFNOR	AFNOR Alloy	DIN	ASTM
 AMPCO® BRONZE	AMPCO® 8	AMPCO METAL Specification			
	AMPCO® 18				
	AMPCO® 18.23				
	AMPCO® 21				
	AMPCO® 22				
	AMPCO® 25				
	AMPCO® 26				
	AMPCO® 45				
	AMPCO® M4				

 AMPCOLOY® ALLOYS	AMPCOLOY® 83	CuBe2		2.1247	C17200
	AMPCOLOY® 944	AMPCO METAL Specification		Alloys without Beryllium	
	AMPCOLOY® 940				
	AMPCOLOY® 88	CuCoNiBe		~ 2.1285	~ C17510
	AMPCOLOY® 95	CuCoNiBe		~ 2.1285	~ C17510
	AMPCOLOY® 972	CuCrZr		2.1293	C18150

Alloy type	Standards					
	EN 1982	EN	DIN	CDA	ASTM	GAM MM12
ALUMINUM BRONZES	CUAL10FE5NI5	CC333G	DIN 2.0975	C95500	B505	CUAL9NI5FE4
	CUAL10FE2	CC331G	DIN 2.0940	C95200	B505	CUAL10FE3
	CUAL9	CC330G		C95300	B505	-
	CUAL10NI3FE2	CC332G	DIN 2.0970			CUAL9NI3FE2
	CUAL11FE6NI6	CC334G	DIN 2.0980	C95520	B505	-
TIN BRONZE	CUSN8	-	-	-	-	
	CUSN9	-	-	-	-	CUSN8
	CUSN10	CC480K	DIN 2.1050	C90700	B505	-
	CUSN12	CC483K	DIN 2.1052	C90800	B427	-
	CUSN11PB2	CC482K	DIN 2.1061	C92700	B505	CUSN12
	CUSN12NI2	CC484K	DIN 2.1060	C91700	B427	-
	CUSN7ZN2PB3	CC492K	DIN 2.1093	-	-	-
BRASS	CUZN25AL5MN4FE3	CC762S	DIN 2.0598	C86200	B505	-
	CUZN34MN3AL2FE1	CC764S	DIN 2.0596	C86700*	B584	-
	CUZN35MN2AL1FE1	CC765S	DIN 2.0592	C86400*	B584	-
	CUZN37AL1	CC766S	DIN 2.0510	C86500	B505	-
	CUZN19AL6	-	-			CUZN19AL6
	CUZN23AL4	-	-	-	-	CUZN23AL4

Nominal Chemical Composition (Remainder Cu)							Mechanical & Physical Properties								Usage Guideline		
Sn	Zn	Pb	Al	Fe	Ni	Mn	D Kg/dm³	Rm MPa	Rp 0,2 MPa	A ₅ %	HBW 10/3000	Thermal Conductivity W/m.K	Linear Expansion Coefficient 10 ⁻⁶ /K	Coefficient of Friction Unlubricated	Need for Lubrication	Average Speed m/s	Average Load MPa
0.25			6,5	2,5			7.95	552	283	40	153	54	16	0.17	Moderate ●	1.5	85
			10,5	3,5			7.45	724	365	14	192	63	16	0.18	Moderate ●	1.5	100
			10,5	3,5			7.45	758	386	16	207	59	16	0.18		1.5	100
			13,1	4,4		2	7.21	758	420	1	286	46	16	0.21		0.7	115
			14,1	4,7		2	7.06	724	427	0.5	332	42	16	0.25	Moderate ●	0.6	120
Proprietary							6.93	R _{mc} 1580	R _{p0.1} 710	0.2	364	33	16	0.30	Moderate ●	0.5	125
							6.93	R _{mc} 1601	R _{p0.1} 720	0	420	33	16	0.32	Moderate ●	0.4	130
			10	2,5	5	1.5	7.53	814	517	15	228	46	16.2	0.23	High ●	1.5	90
			10, 5	4,8	5	1.5	7.45	1000	793	8	260/300	42	16	0.23		1	330


Cr	Co	Be	Zr	Ni	Si	Mn						Thermal Conductivity W/m·K			Electrical Conductivity % IACS	RWMA Class
												20°C	100°C	200°C		
	0,5	2					8.26	1310	827	5	360	106	130	145	20%	4
1				7	2		8.7	938	730	5	294	156	170	190	30%	4
0,4				2,5	0,7		8.71	689	517	13	210	208	226	243	48%	3
Co + Ni2,5		0,5					8.75	890	680	14	270	230	251	272	48%	3
Co + Ni2		0,5					8.75	830	550	10	240	217	235	254	52%	3
>1			>0,10				8.87	520	466	18	151	333	350	367	82%	2

Typical nominal chemistry%				Typical applications
Al	Fe	Ni	Mn	
10.8	4	4.2	-	Demanding applications where high mechanical properties, good corrosion resistance and high ductility are required. Machinery, shafts, valve bodies, propeller hub, worm gears, bushings, propeller blades, wear plates.
9	3.2	-	-	
10	1.2	-	-	
9	2.5	3.2	0.8	
11	4.8	5.1	-	
Sn	Pb	Zn	Ni	Typical for high strength, low speeds and heavy loads applications like gear, bushing and bearing. Pump impellers, piston rings, steam fittings, valve bodies, retaining and clamps. Also for connectors, relays and conductor springs.
8	1	1.5	1	
8.5	0.05	0.2	0.05	
11	-	-	-	
12	0	-	-	
10	1.8	-	-	
12	0	-	1.5	Typical for low friction applications with slow speed and high pressure. Fasteners, screw nuts, bushings, cams, frames, worm gears, machine parts, hooks, press dies, shafts, valve stems.
7	3	2	2	
Zn	Al	Fe	Mn	
25	4	3	3.8	
34	2	2	2	
38	0.5	1	0.5	
39	1	1.2	0.8	
19	6	-	-	
23	4	-	-	


SPECIFY AMPCO®





Wear-Resistant Bronzes Corrosion-Resistant Bronzes

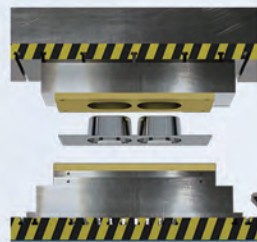

Deep Drawing



AMPCO® 21/22/25/26

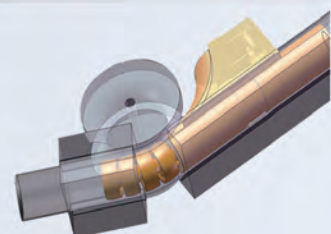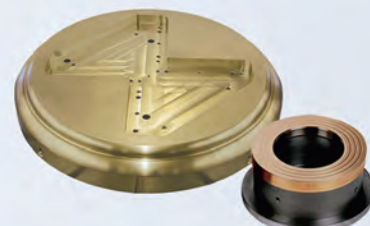

Tube Bending



AMPCO® 18/21/22/25/M4



Tube Forming




AMPCO® 18/21/22/25



Rollercoasters
AMPCO® 18/M4



Steel Mill
AMPCO® 18

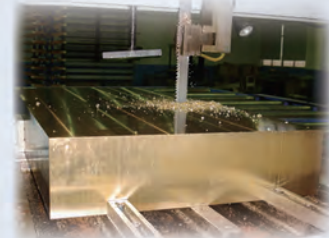

General Engineering
AMPCO® 18/21/M4



Welding Materials
AMPCO - TRODE®



AMPCO SAFETY TOOLS®



High-Conductivity Alloys



Plastics Industries



AMPCOLOY® 940/944/83/95



Aerospace & Offshore



AMS 4640/4590/4880/4881



Resistance Welding & Plunger Tips



AMPCOLOY® 972/940/83/95




Die Casting
AMPCOLOY® 940/89/95



Soap Mould
AMPCOLOY® 940



EXCELLENCE IN ENGINEERED ALLOYS

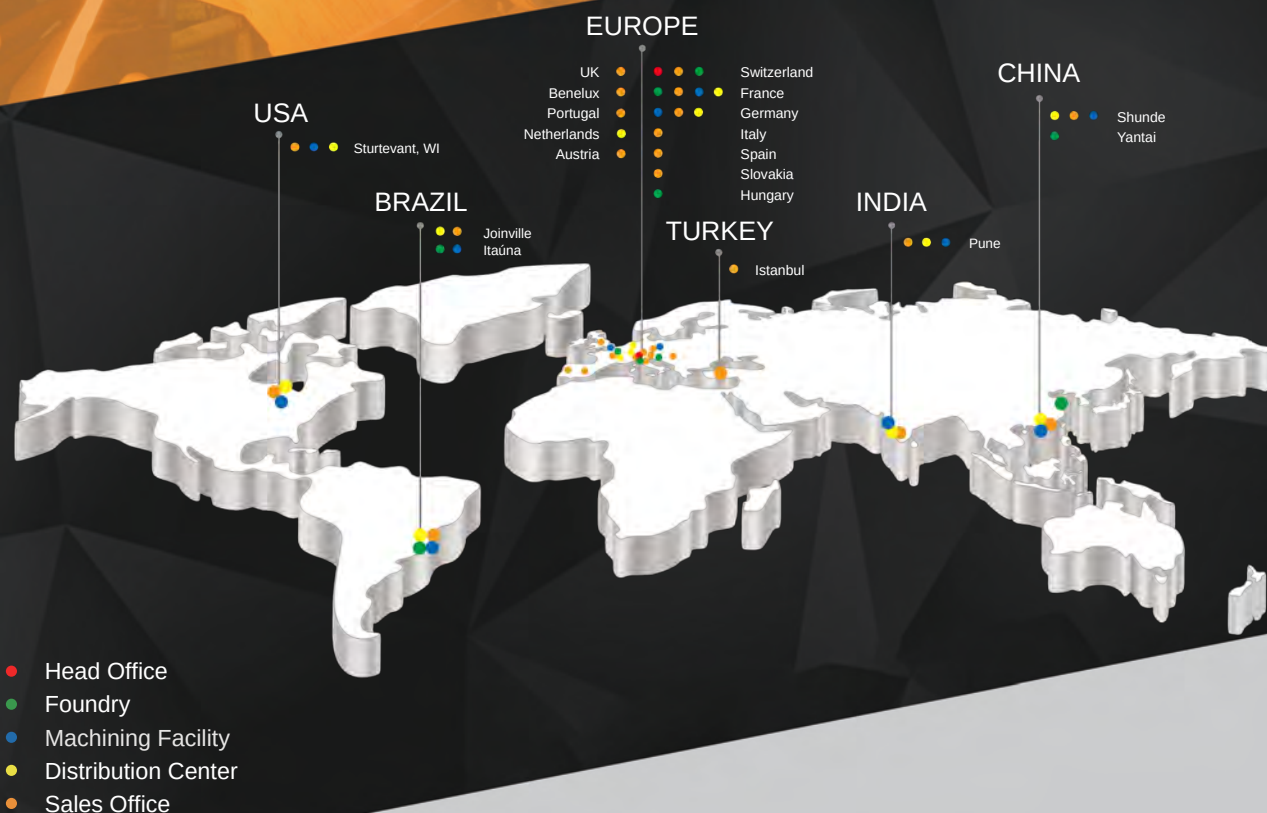

EUROPE (Headquarters)

AMPCO METAL S.A.

Route de Chésalles 48
P.O.Box 45, 1723 Marly
SWITZERLAND
Tel.: +41 26 439 93 00
Fax. +41 26 439 93 01
Info@ampcometal.com

BRASIL

AMPCO METAL Brasil Ltda.

Rua Dona Francisca 8400 - galpão 2
Zona Industrial Norte
Joinville, SC - 89219 - 600
Tel.: +55 47 3305 0020
Fax. +55 47 3305 0021
Infobrasil@ampcometal.com

CHINA

AMPCO METAL (Foshan) Co., Ltd

Warehouse 9-1 No 9 Xinyue road
Jinqiao Industrial Park, Wusha
Daliang town, Shunde, Foshan
Guangdong Province, P.R.China.
P.C.528333
TOLL FREE PHONE: 4008 899 028
Tel.: +86 (0) 757 2232 6571
Fax. +86 (0) 757 2232 6570
Infochina@ampcometal.com

INDIA

AMPCO METAL INDIA PVT. LTD.

A-8/4, Village - Nighoje,
Chakan MIDC, Phase IV, Tal : Khed
Pune - 410501, Maharashtra - INDIA
Tel.: +91 2135 610 810
Fax. +91 2135 610 811
Infoindia@ampcometal.com

U.S.A

AMPCO METAL Inc.

1221 Grandview Pkwy
Sturtevant, WI 53177
Tel.: +1 800 844 6008
Fax. +1 847 437 6008
Infousa@ampcometal.com

